
BoxBed II - veneer frame

- 1. Assemble the base.
- 2. The bed frame is assembled around the base.





3. The suspension parts are attached to the foot end and side frames.

Foot end frame:

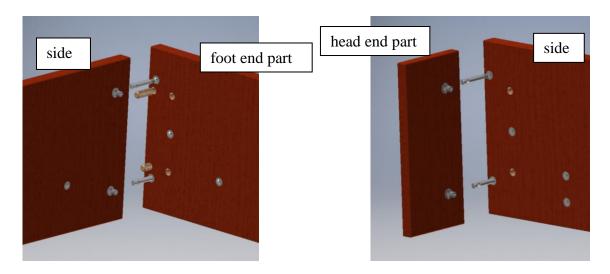



Side frame:

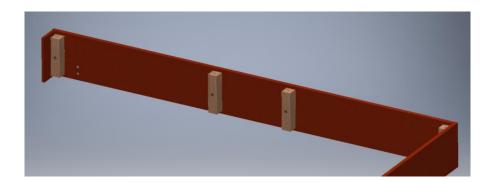

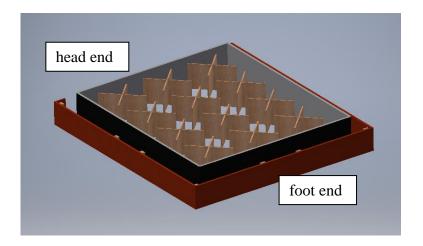


4. If the bed is ordered with legs, they are fitted to the bed frame.






5. Bottom plates are fitted to the base.

Head end:

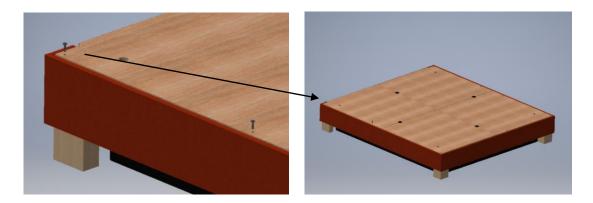

- 6. The bed frame is fitted to the bottom plates. All screws should be positioned, before they are tightened.
- 7. The leg can be adjusted by untightening the screws (A) of the bed frame, pulling down the leg till it touches the floor (B) and then tightening it again.

Head end:



Foot end:

